



Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/30/20'		

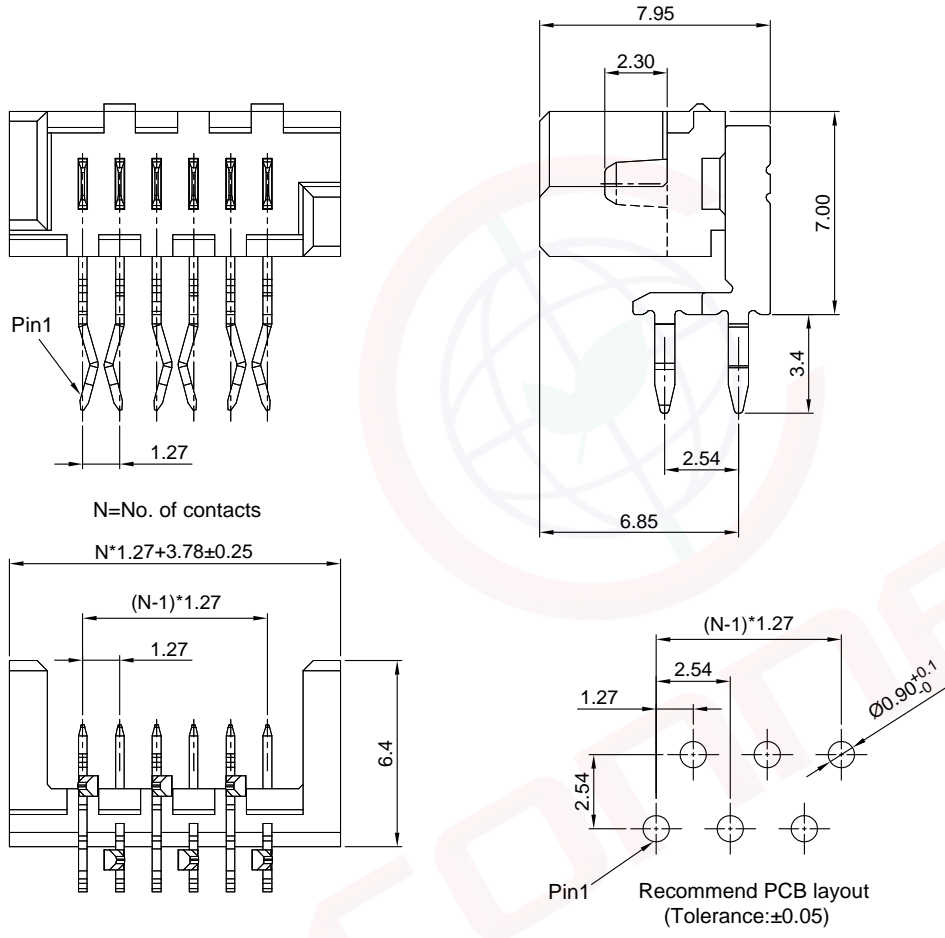

- Notes:
- Specifications:
- Contact Resistance: 20mΩ Max.
 - Insulation Resistance: 1000MΩ Min.
 - Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 - Current Rating: 2.4A.
 - Temperature: -40°C~+105°C.
- Materials:
- Contact Material: Copper Alloy.
 - Contact Plating: Gold or Tin Plated.
 - Insulator Material: LCP, Black, UL94-V0.
- Product Number Code:
- DS1015-09 - X X X X
- Packing type: B:Tube, P:Polybag, R:Tape on reel
 - Contact plating: 2: Nickel + Gold flash, 6: Full Tin, 8: Full gold flash
 - Housing color: B:Black
 - No. of contacts: 04 06 08 10 12 14, 16 18 20 24 26

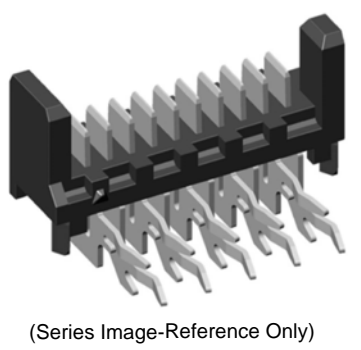

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm White IDC Male Angle DIP Type
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1015-09 SERIES
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY ELECTRONIC CO., LTD			
SCALE		1:1					
DRAWING NO.		C-DS1015-09-XXXX-A					