






Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failure or delays to exercise such rights does not constitute a waiver of such rights.

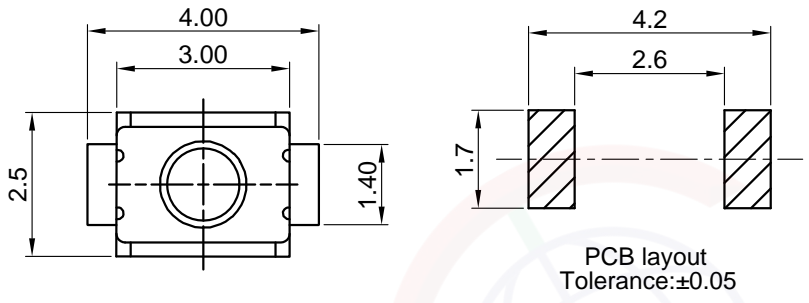

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/05/18'		
B	DRAWING UPDATE	JLZ 05/20/22'		

NOTES:

- Specifications
 - Switch Function: Single Pole Single Throw
 - Contact Rating: 50mA at 12Vdc
 - Insulation Resistance: 100MΩ min.
 - Contact Resistance: 50mΩ max.
 - Operating Life: 100,000 cycles
 - Travel: 0.15±0.1mm
 - Operation Temperature Range: -20°C to +70°C
 - Wave Soldering: Recommended Solder Temperature At 500°F(260°C)max. 5 Seconds, Subject To PCB 1.6mm Thickness.
- Product number code:

DS1042-24 - X X X X X X X

 - Operating Life
10:100,000 cycles
 - Operating force
160: 160±30gf
250: 250±30gf
 - Packing type
A: polybag
R: tape & reel
 - Actuator color
B: Black
 - Housing color
V: Ivory
 - Profile Height(DIM. H)
015:1.5mm 017:1.7mm
 - No. of contacts
2: 2P

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	TACT SWITCH SMT TYPE 2.5mmX3.0mm	
X. ±0.60	X. ±5°	UNITS	mm	SHEET	1 OF 1	
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	DS1042-24 SERIES	
.XX ±0.25	.XX ±2°	晨翔电子有限公司 CONNELY ELECTRONIC CO., LTD				
DRAWING TYPE	CUSTOMER					
SCALE	1:1					
DRAWING NO.	C-DS1042-24-XXXXXX-B					