

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights are strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

P1 P2 Connection		
P1	P2	Wire color
/	Pin1	White/Orange
/	Pin2	Orange
/	Pin3	White/Green
Pin2	Pin4	Blue
Pin3	Pin5	White/Blue
/	Pin6	Green
/	Pin7	White/Brown
/	Pin8	Brown

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/15/23'		

Notes:

Specifications:



- Contact Resistance: 3Ω Max.
- Insulation Resistance: 500MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:0.5A.
- Voltage Rating:24V AC rms.
- Temperature: -40°C~+85°C.

Materials:

- Insulating material:Nylon.
- Contact material: Copper Alloy.

Product Number Code:
DS1162-10 - X X X X X X X X X X

- P1 Pin Style
1: W/ Pin2,Pin3
- P2 Style
A: RJ45
- Wire length(Dim L)
3000: 3000mm
- Shell color
B: Black
- Contact plating
8: Gold flash
- Housing color
B: Black
- Mounting type
W: Soldering type
- Wire gauge
28: 28AWG
- Connector type
M: Male
- No. of contacts
2: 2Pin

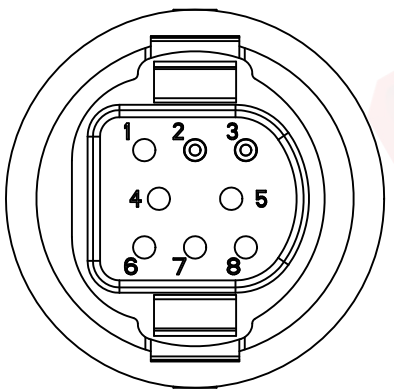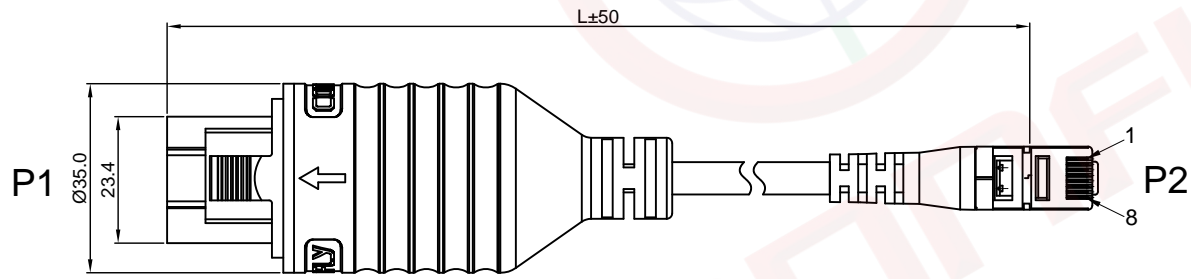

Pin Hole View
Scale:2/1

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1162-10-XXXXX-A	

PROJECTION		TITLE	
UNITS	mm	Solar Connectors Wire to Wire Type	
SHEET SIZE	A4	SERIES	DS1162-10 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD