


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document without the prior written permission of CONNELY is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

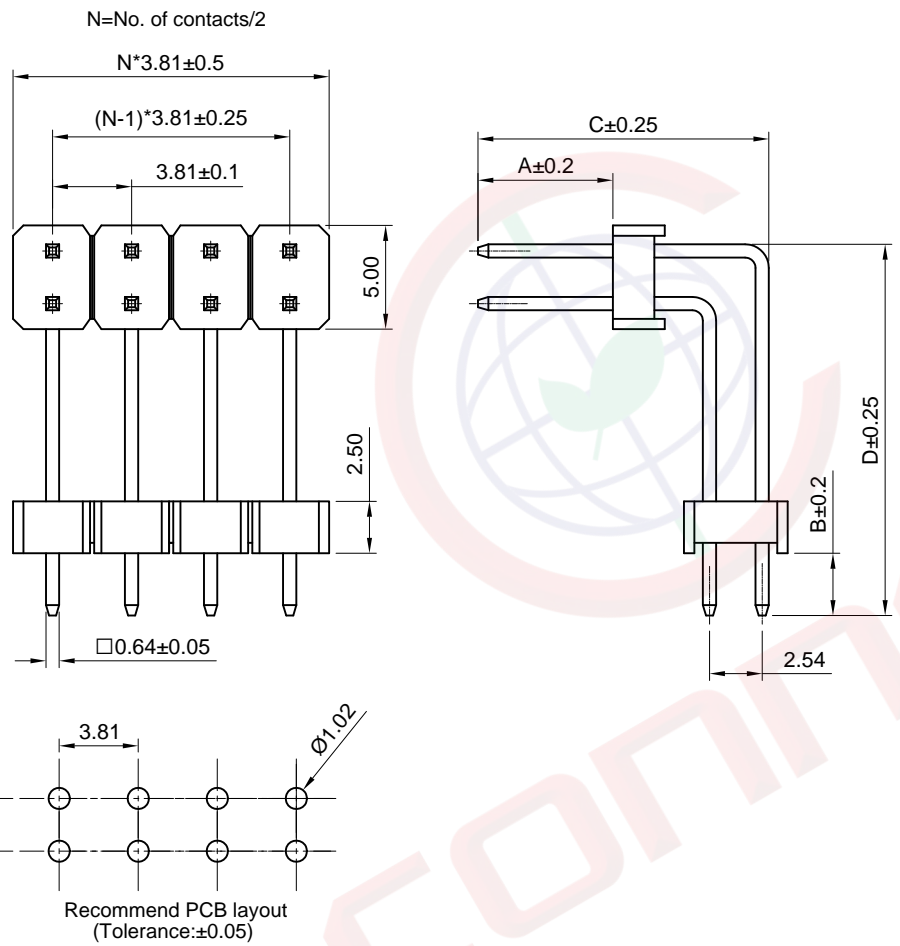

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/04/16'		LJC 03/04/16'
B	DRAWING UPDATE	JLZ 08/15/20'		

- NOTES:
- Specifications:
- Contact resistance: 20mΩ Max.
 - Insulation resistance: 1000MΩ Min.
 - Dielectric withstanding voltage: 600V AC(Rms) for 1 minute.
 - Current rating:3A.
 - Voltage rating:250V AC Rms.
 - Temperature: -40°C~+105°C.
- Materials:
- Contact material: Copper alloy.
 - Contact plating: Gold plating over nickel.
 - Insulator material: PBT,Black,UL94-V0.

Product number code:
 DS1029-15 - X X X X X X - X

- Plating level
3A:Level 3A
B:Level B
- Dim. A B C D type
A*,-B*,-C*,-D*.*
- Mounting type
R: R/A type
- Housing color
B:Black
- Contact plating
8: Full gold flash
- Connector type
P:Plug
- No. of contacts
2x2 - 2x25

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54*3.81mm Pin Header Double Row Stack R/A Type				
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1029-16 SERIES				
.X	±0.38	.X	±3°								
.XX	±0.25	.XX	±2°								
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD							
SCALE		1:1							SHEET	1 OF 1	
DRAWING NO.		C-DS1029-16-XXXXXX-X-B									