



Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document without the prior written permission of CONNELY may result in legal action. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/24/09'		LJC 03/24/09'
B	DRAWING UPDATE	JLZ 08/21/20'		

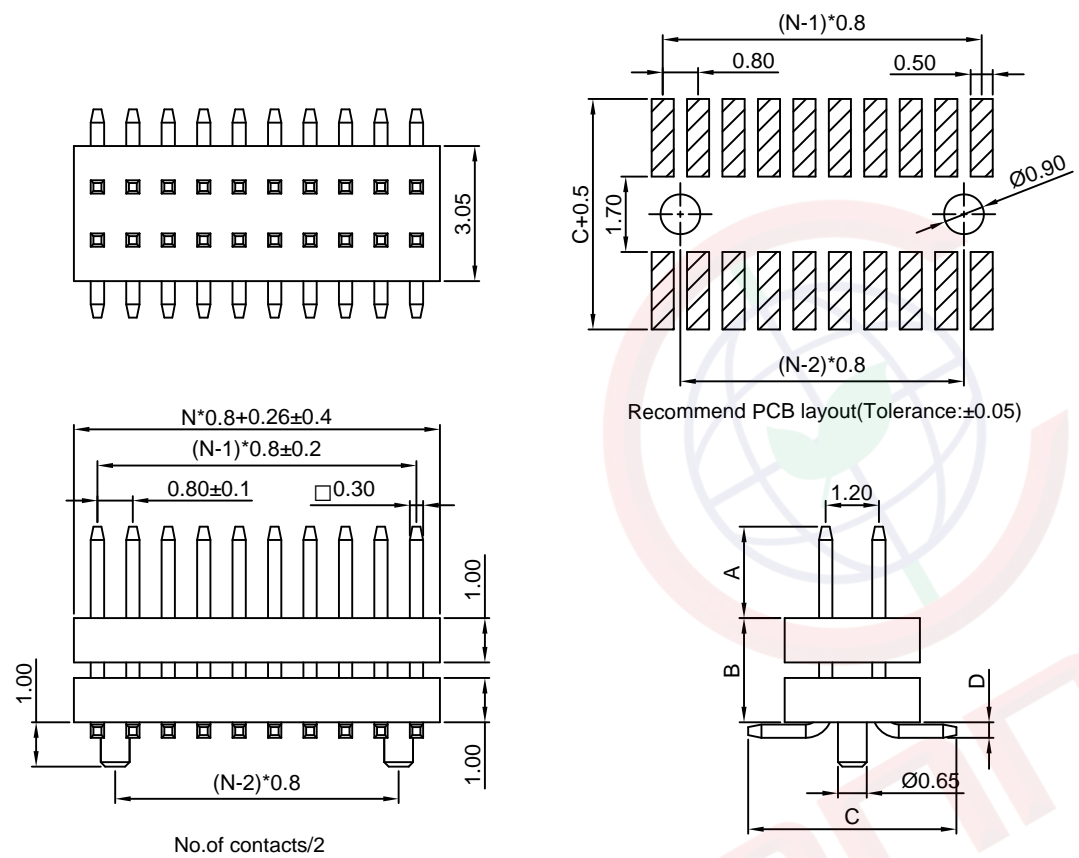

Notes:  
 Specifications:  
 1. Contact Resistance: 30mΩ Max.  
 2. Insulation Resistance: 1000MΩ Min.  
 3. Dielectric Withstanding Voltage: 300V AC(rms) For 1 Minute.  
 4. Current Rating:0.75A.  
 5. Temperature: -40°C~+105°C.  
 Materials:  
 1. Contact Material: Copper Alloy.  
 2. Contact Plating: Gold Plating Over Nickel.  
 3. Insulator Material: High temp,Black,UL94-V0.  
 Product Number Code:  
 DS1031-29 - X X X X X X X X X - X

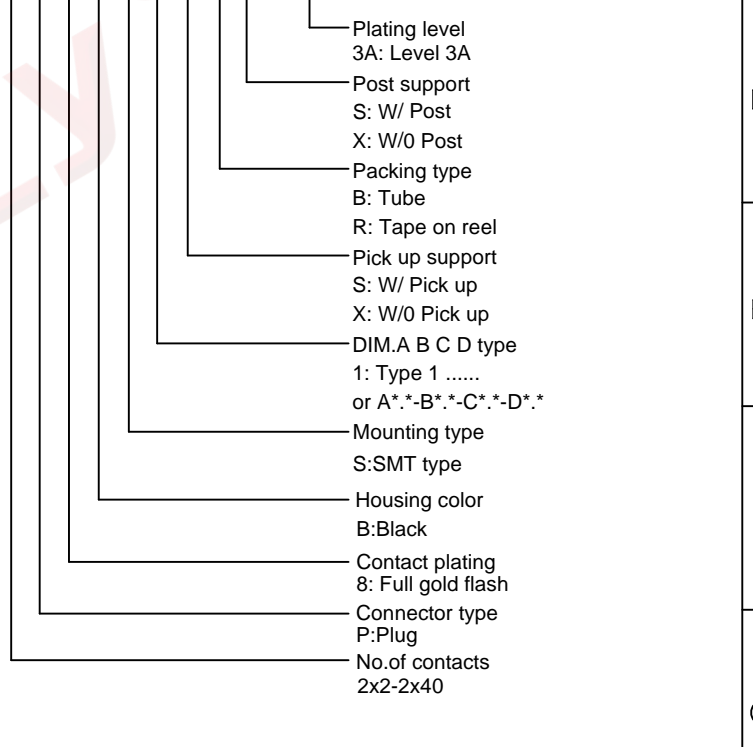

Type	DIM A	DIM B	DIM C	DIM D
1	2.80	2.35	4.70	0.35

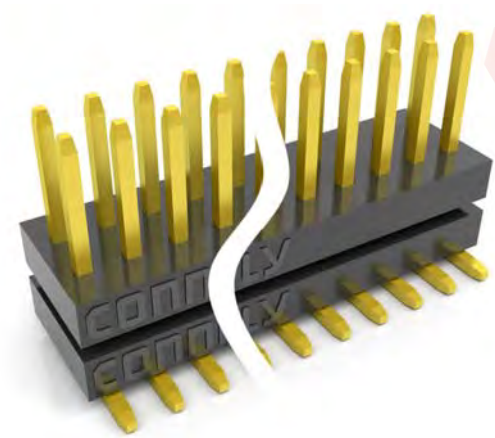

(Series Image-Reference Only)

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	0.8*1.2mm Pin Header Double Row Stack SMT Type H=1.0mm
X. ±0.60	X. ±5°	UNITS mm	SHEET	
.X ±0.38	.X ±3°	SHEET SIZE A4	SERIES DS1031-29 SERIES	
.XX ±0.25	.XX ±2°			
DRAWING TYPE	CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD	
SCALE	1:1	SHEET 1 OF 1		
DRAWING NO.	C-DS1031-29-XXXXXXXX-X-B			