


N:Positions.

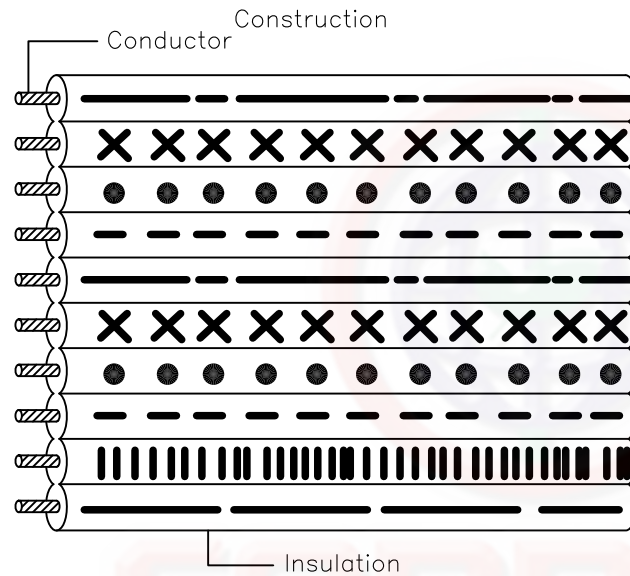

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 15/06/05		LJC 15/06/05
B	ADD P/N SUPPORT	JLZ 01/22/15'		

NOTES:

1. PRODUCT DESCRIPTION

- . Tinned stranded or solid copper conductor, 26 -16 AWG
- . Color-coded PVC insulation
- . Rated temperature: 80°C Rated voltage: 300volts
- . Uniform thickness of wire to ensure easy stripping and cutting.
- . Resistant to acids,oils,alkalies,moisture and fungus.

2. APPLICATIONS

- . For general purpose internal wiring of electronic and electrical equipment.

3. PRODUCT NUMBER CODE:

DS1059 - X X X - X

Packing Specifications <sup>ⓑ</sup>

- 76.5: 76.5m/reel
- 153: 153m/reel
- 500: 500m/reel

Wire AWG  
16 18 20 22 24 26

Mark Color <sup>ⓑ</sup>

- R: Red
- L: Blue

No. of positions  
02 ~ 20

Product Name	Conductor			Insulation Thickness	Outer Diameter
	AWG	Construction (No./mm)	Sect.Area (mm <sup>2</sup> )		
2468 (Stranded)	26	7/0.160	0.13	0.45	1.38±0.10
	24	11/0.160	0.21		1.51±0.10
	22	17/0.160	0.33		1.60±0.10
	20	21/0.180	0.52		1.80±0.10
	18	34/0.180	0.82		2.00±0.10
	16	26/0.254	1.31		2.20±0.10

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1059-XXX-X-B		

PROJECTION		TITLE
UNITS	mm	2468 EXTRUDED RIBBON CABLE
SHEET SIZE	A4	SERIES DS1059

晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD