REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	LJC 09/04/08'
B	PACKING CHANGE	JLZ 03/23/16'	HZW 03/23/16'	LJC 03/23/16'

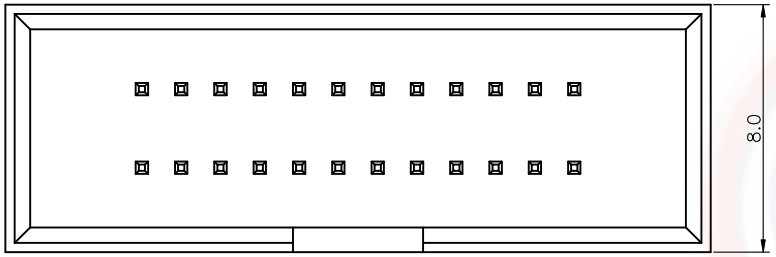

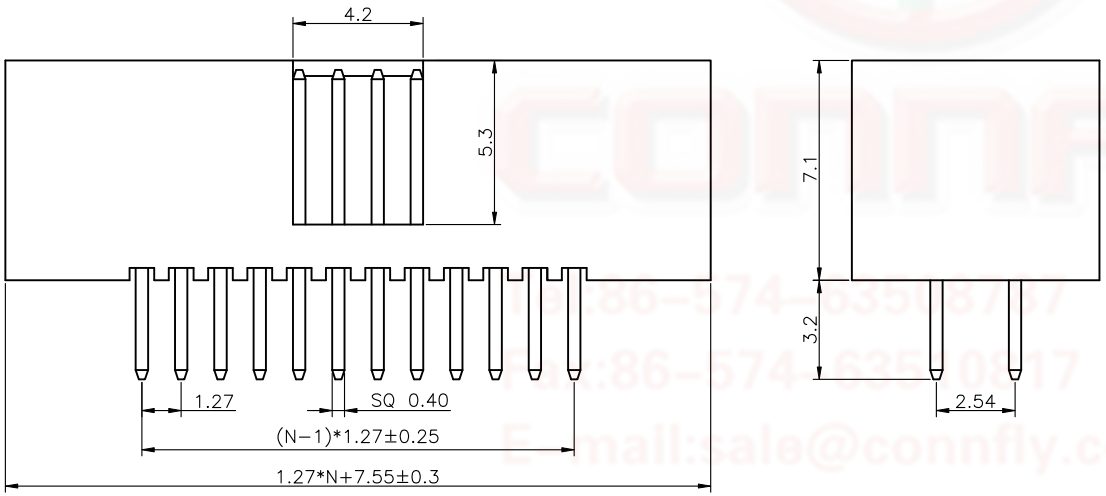

N=No.OF CONTACTS/2

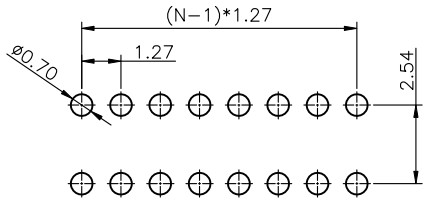

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

NOTES:

1. MATERIAL
   1.1 INSULATOR:THERMOPLASTIC(UL 94V−0).
   1.2 CONTACT MATERIAL:COPPER ALLOY.

2. SPECIFICATION
   2.1 CURRENT RATING:1.0 Amp.
   2.2 INSULATION RESISTANCE:1000MΩ Min.
   2.3 DIELECTRIC WITHSTANDING:300VAC.
   2.4 CONTACT RESISTANCE:20mΩ Max.
   2.5 OPERATING TEMPERATURE:−40°C TO+105°C.
3. PART NUMBER: DS1064−16
4. PRODUCT NUMBER CODE:

DS1064−16 − X X X X X − X

- PLATING LEVEL
  3A: 3A LEVEL
- PACKING TYPE
  A: TUBE
  B: TRAY
- HOUSING COLOR
  B:BLACK
- CONTACT PLATING
  8: FULL GOLD FLASH
  6: FULL TIN
- MOUNTING TYPE
  V: STRAIGHT TYPE
- No.OF CONTACTS
  10 20 26 30 34
  40 50 60 68 70
  80 90 100

CONNFLY
Tel:86-574-63508737
Fax:86-574-63508817
E-mail:sale@connfly.com
http://www.connfly.com
Add:East Industry Zone KuangYan
Town Cixi Ningbo China
P.C:315336

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1064−16−XXXXX−X−B		

PROJECTION		TITLE	1.27*2.54mm BOX HEADER PITCH
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1064−16 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD