


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.


1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/26/15'		

A Dept
 Qty
 DC 1
 ED 1
 IE 1
 ISO 1
 PD 1
 R&D 1
 SD 1
 QA 1
 QC 1
 QF 1
 B
 C
 D
 E
 F
 G
 H

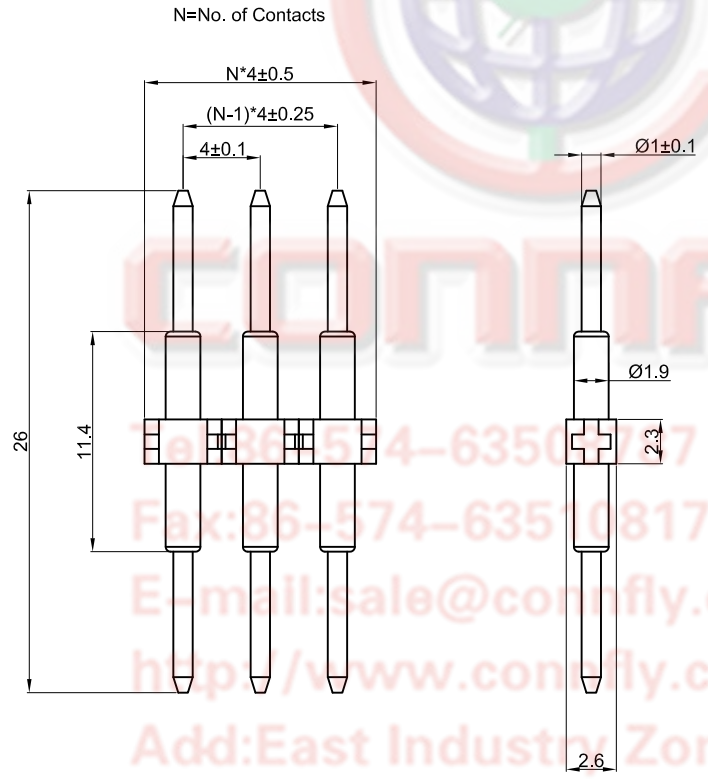

- NOTES:
- Materials:
 - Insulator: High Temperature ,UL94 V-0 Rated, RoHS,REACH compliance.
 - Contact: Copper Alloy, Plating Tin .
 - Specifications:
 - Temperature Range: -45~+105°C.
 - Contact Resistance: 20mΩ maximum.
 - Insulation Resistance: 1000MΩ minimum.
 - Voltage Rating: 320V AC/DC.
 - Current Rating: 4A max per pin.
 - Product Number Code:

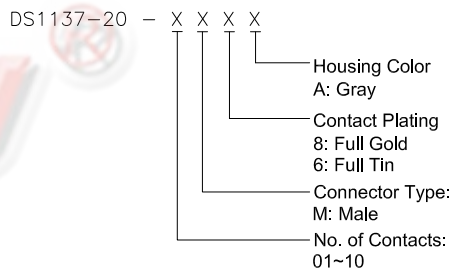

Tel: 36-574-6350017
 Fax: 36-574-6350817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	4.00mm Pin Header For LED Series Connector	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1137-20 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1137-20-XXXX-A						

1 2 3 4 5 6 7 8