

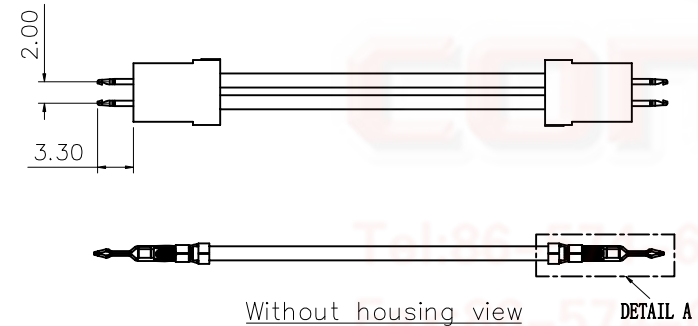
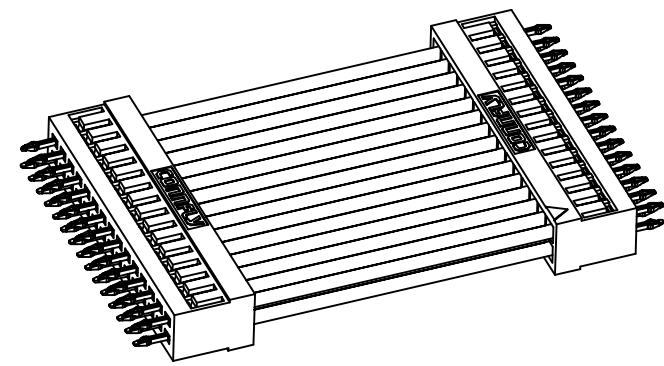


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	Andy_H 01/20/16'		LJC 01/20/16'

N=ALL POSITIONS/2

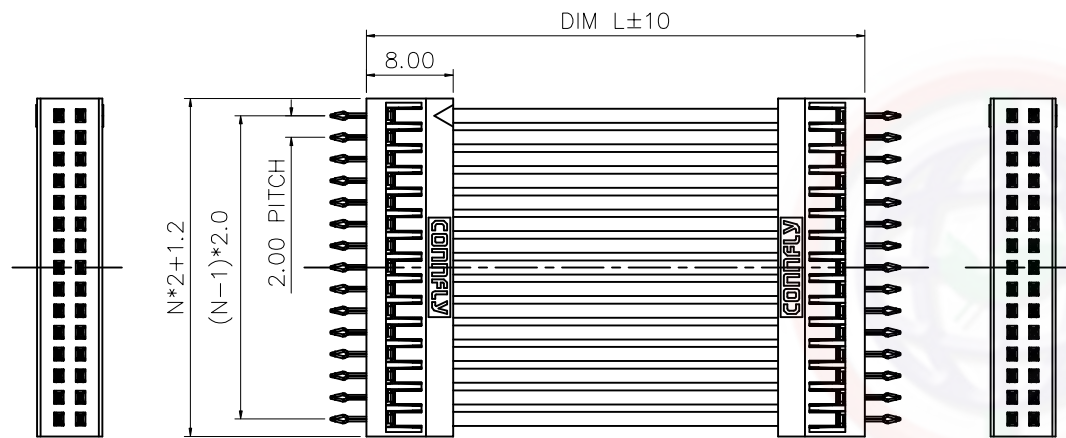


Number Code:
DS1067-02-X X X X X

- Wire Length(DIM L):
080: 80mm
150: 150mm
- Contact Plating:
6: Full Tin ; 8: Full Gold
- Housing Color:
W: White
- Wire Gauge:
26: AWG 26#; 24: AWG 24#
- Mounting type:
C: Crimp
W: Crimp+Soldering
- No. of contacts:
2*2-2*20

NOTES:

1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Contact: Copper Alloy
- . Wire range: AWG#26(2468)
- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance: $\leq 100m\Omega$
- . Insulation resistance: $\geq 1000M\Omega$
- . Withstanding voltage: 500V, AC 1 minute
- . Temperature range: $-20 \sim +80^{\circ}C$

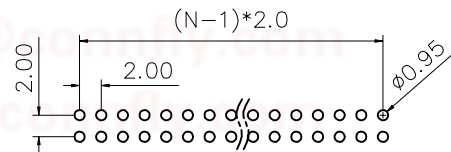

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ± 0.60	X. $\pm 3^{\circ}$		2.0mm SAN+SAN TYPE CABLE WITH CRIMP+SOLDERING
.X ± 0.38	.X $\pm 2^{\circ}$	UNITS mm	SHEET SIZE A4
.XX ± 0.25	.XX $\pm 1^{\circ}$	SHEET SIZE A4	SERIES DS1067-02 SERIES
DRAWING TYPE CUSTOMER			
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1067-02-XXXXXX-A		